

**WOKS Series**  
Wall Type



Wall-mounted axial fans with support and sheet steel rotor. specially designed to obtain high energy efficiency.

FAN

- Sheet metal support base
- Anti-contact protective grille pursuant to standard UNE-EN ISO 12499
- Sheet steel rotor
- Grille-rotor air flow direction

MOTOR

- Class F and B motors with ball bearings and IP54 protection.
- High efficiency external rotor motors.
- Single-phase 230V-50Hz and three-phase 400V-50Hz.
- Operating temperature: -30°C +60°C.




TECHNICAL SPECIFICATIONS

MODEL	MAX. FLOW (m <sup>3</sup> /h)	Watt	dBA	AMPER	RPM	SPEED CONTROL
WOKS 200	850	68	63	0,30	2480	RS-1-400
WOKS 250	1600	106	67	0,47	2480	RS-1-400
WOKS 300	2400	180	73	0,79	2700	RS-1-400
WOKS 350	3100	130	64	0,58	1400	RS-1-400
WOKS 400	3400	160	69	0,73	1430	RS-1-400
WOKS 450	4800	245	73	0,10	1400	RS-1-400

AIR FLOW DATA


MODEL	AIR FLOW DATA / PA / (m <sup>3</sup> /h)					
	25	50	70	100	150	200
WOKS 200	750	600	420	300	-	-
WOKS 250	1500	1400	1250	1100	-	-
WOKS 300	2350	2300	2000	2100	1600	900
WOKS 350	2850	2600	2150	1800	-	-
WOKS 400	3200	3100	2900	2700	2000	-
WOKS 450	4650	4500	4300	4000	3500	2600

# TECHNICAL SPECIFICATIONS

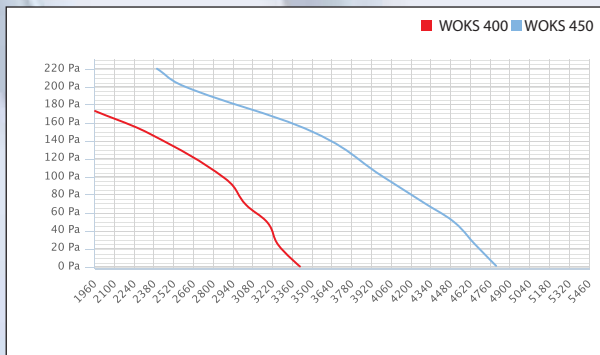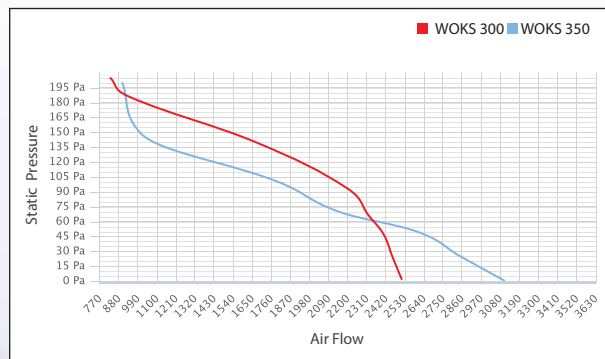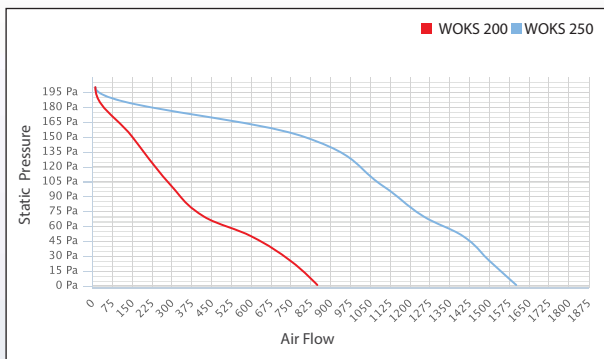

## DIMENSIONS

MODEL	DIMENSIONS / mm			
	Ø A	B	C	D
WOKS 200	212	320	70	260
WOKS 250	262	365	90	315
WOKS 300	313	430	92	380
WOKS 350	360	485	88	435
WOKS 400	408	540	100	490
WOKS 450	465	575	125	535

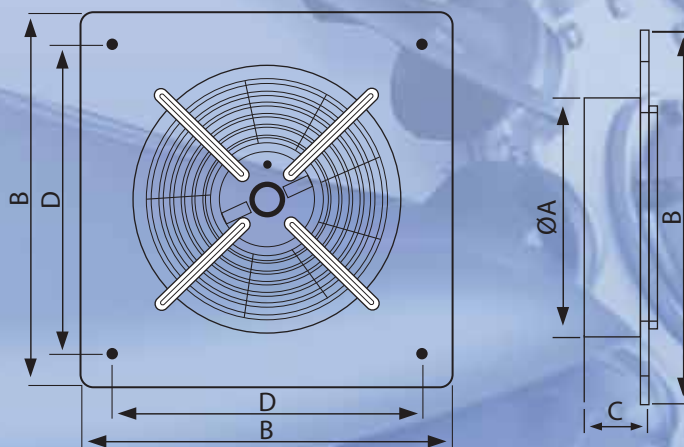

## ACCESSORIES

MODEL	SPEED CONTROL
	RS-1-400